


SIDEWALK DETAIL
(TYPICAL SECTION)
(N.T.S)



NOTES

- ALL CONCRETE SHALL BE K.D.O.T. CLASS "A"
- DENSE GRADED AGGREGATE SHALL BE COMPACTED PRIOR TO PLACEMENT OF CONCRETE.
- CONTRACTION JOINTS SHALL BE PLACED AT FIVE (5) FOOT INTERVALS.
- EXPANSION JOINTS SHALL BE PLACED AT FIFTY (50) FOOT INTERVALS AND ALONG ALL EDGES BUTTED NEXT TO FIXED OBJECTS.
- MAXIMUM SLOPE ACROSS UTILITY STRIP SHALL BE 1/2" PER FOOT TOWARD ROAD.

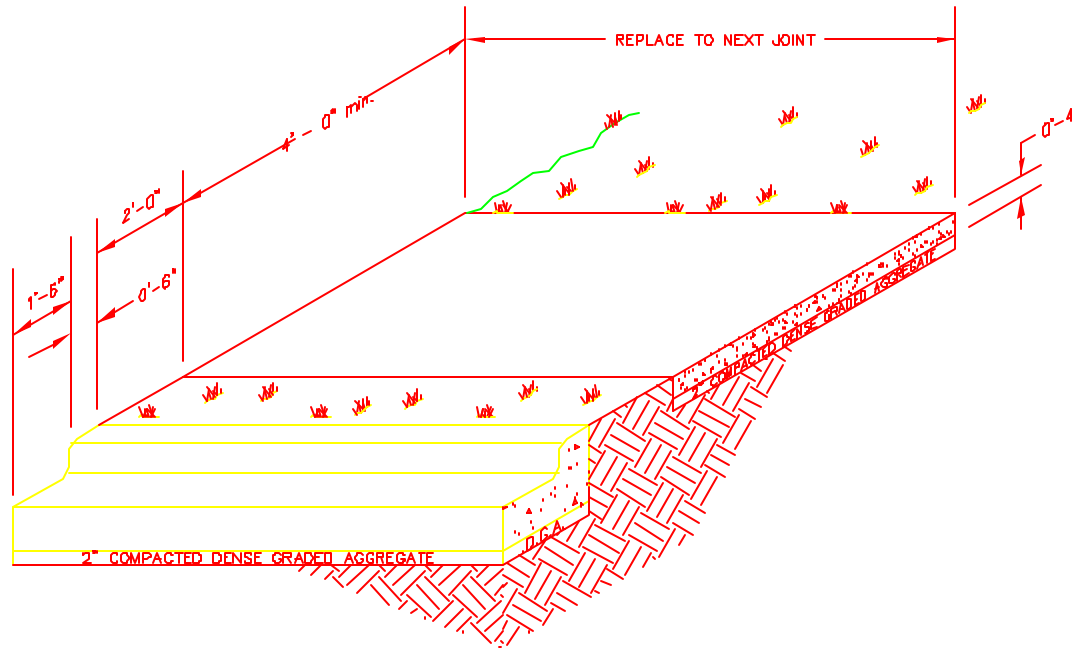

CITY OF BOWLING GREEN
PUBLIC WORKS
PLANNING AND DESIGN

STANDARD DRAWING
SIDEWALK / CURB & GUTTER

J: \DWG\DETAIL\S_w_CG.DWG

SHEET 1 OF 1

JOB NO.	SCALE	DATE
00-0000	N.T.S.	8/5/02